


Ring: 5.4 INCH

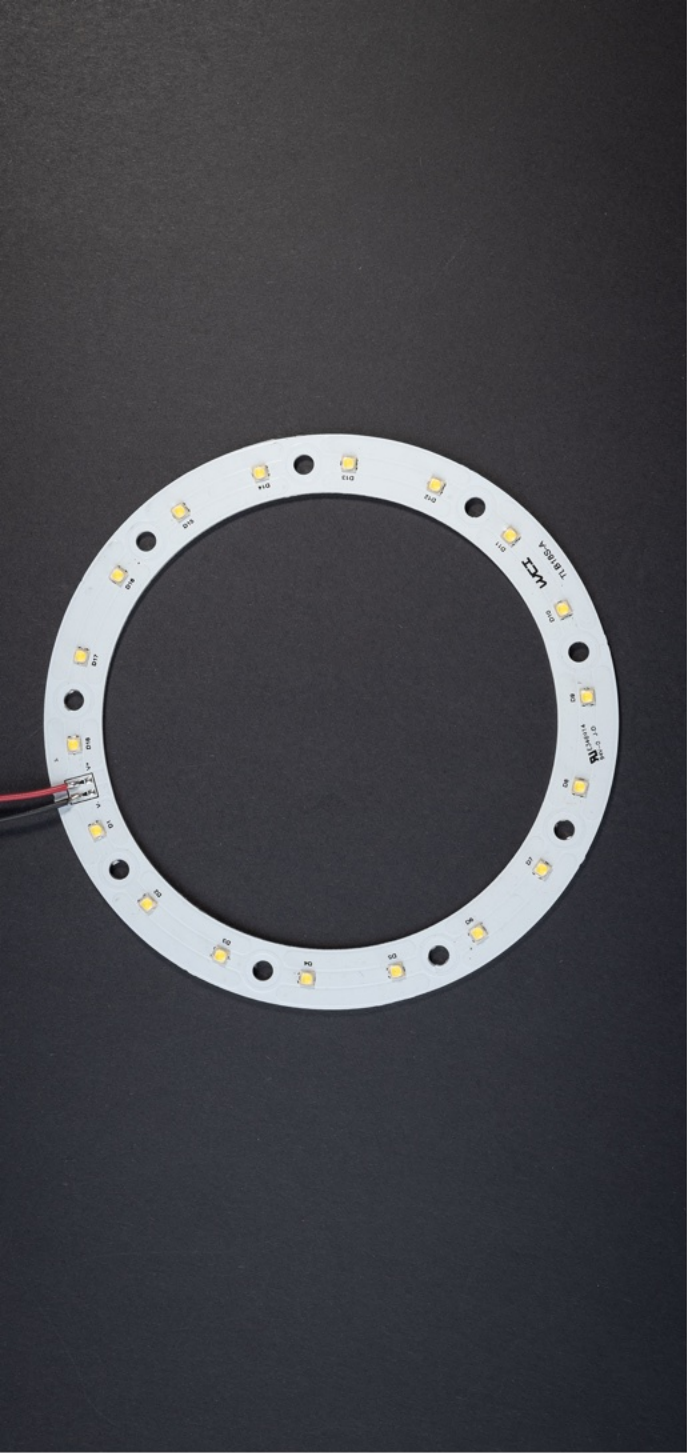

LED Module for Round Applications

Module No. I5GDZ18S4070C

No. of LED	18 LEDs
Size	5.4 IN
Material	MCPCB
Color Temperatures Available	2700K - 5000K
CRI	70/80/90
Dimmable	YES
Type	CONSTANT CURRENT
UL Class	CLASS 2
Compliance	ROHS , DLC

Driver

Input Voltage Range	54 V
Input Current Range	0 - 1500 mA

Current

Typ. Current on Board	350 mA 700 mA
Abs Max Current on Board	1500 mA

Voltage

Typ. Voltage on Board	51.19 V 53.30 V
------------------------------	--------------------

Applications

- ARCHITECTURAL LIGHTING
- ROUND LIGHTING
- GENERAL LIGHTING
- CUSTOM / RETROFIT




Module Dimensions

Board Outer Diameter	138 MM
Board Inner Diameter	109.6 MM
Board Height	4.10 MM
Board Weight	25 GRAMS

Features

- LED CHIP PACKAGE 3535
- 3 STEP MACADAM BINNING
- UL-RECOGNIZED COMPONENTS
- IN-STOCK SHIP TIME 24-48 HOURS
- PERFORMANCE PARAMETERS FOR 4000K, 70 CRI

Module Dimensions Drawing

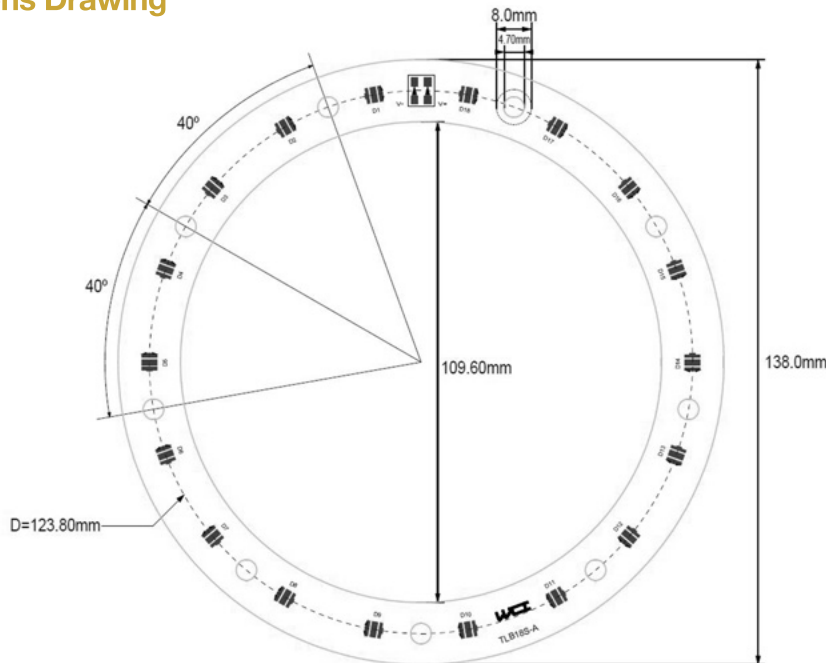

Performance

Lumen Output	3150 lm 5670 lm
Board Efficiency	176 lm/W 152 lm/W
Power Per Board	17.92 W 37.31 W

Connection Spec

Input Wire Cross-Section	SOLID WIRE 26-20 AWG 0.14 - 0.5 MM ²
Input Wire Strip Length	3.50 - 4.50 MM

Contact Us:

Call: 805.499.9513 | Email: sales@wcico.com

World Class Illumination | www.wcico.com