


# Rectangle: 11 INCH

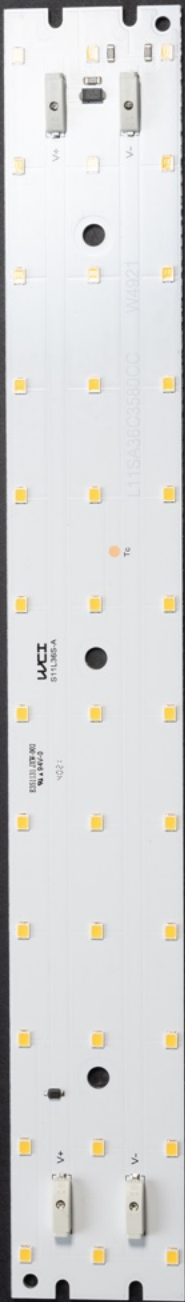

## LED Module for Linear Applications

**Module No. T11GAZ36S3580C**

<b>No. of LED</b>	36 LEDs
<b>Size</b>	11 IN
<b>Material</b>	MCPCB
<b>Color Temperatures Available</b>	2700K - 5000K
<b>CRI</b>	80/90
<b>Dimmable</b>	YES
<b>Type</b>	CONSTANT CURRENT
<b>UL Class</b>	CLASS 2
<b>Compliance</b>	ROHS , DLC

### Driver

<b>Input Voltage Range</b>	36 V
<b>Input Current Range</b>	0 - 900 mA

### Current

<b>Typ. Current on Board</b>	98 mA 195 mA 390 mA
<b>Abs Max Current on Board</b>	900 mA

### Voltage

<b>Typ. Voltage on Board</b>	32.46 V 34.20 V 35.13 V
------------------------------	-------------------------------

### Applications

- ARCHITECTURAL LIGHTING
- LINEAR LIGHTING
- GENERAL LIGHTING
- CUSTOM / RETROFIT




## Module Dimensions

<b>Board Length</b>	279.4 MM
<b>Board Width</b>	38.1 MM
<b>Board Height</b>	5.6 MM
<b>Board Weight</b>	40 GRAMS

## Features

- LED CHIP PACKAGE 2835
- 3 STEP MACADAM BINNING
- UL-RECOGNIZED COMPONENTS
- IN-STOCK SHIP TIME 24-48 HOURS
- PERFORMANCE PARAMETERS FOR 3500K, 80 CRI

## Module Dimensions Drawing

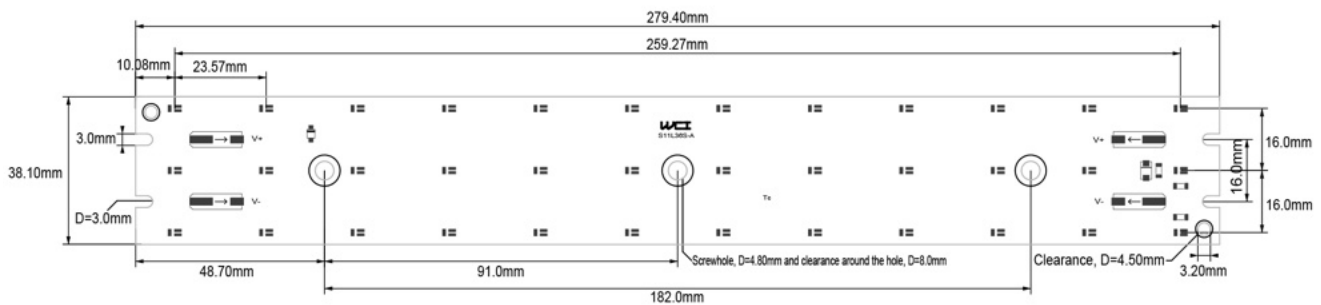

## Performance

	600 lm
	1310 lm
<b>Lumen Output</b>	2400 lm
	209 lm/W
	197 lm/W
<b>Board Efficiency</b>	175 lm/W
	3.16 W
	6.67 W
<b>Power Per Board</b>	13.70 W

## Connection Spec

<b>Input Wire</b>	SOLID/FINE
<b>Cross-Section</b>	STRANDED WIRE
	24-18 AWG
	0.2 - 0.7 MM <sup>2</sup>
<b>Input Wire Strip Length</b>	7 - 8 MM

## Contact Us:

Call: 805.499.9513 | Email: sales@wcico.com

World Class Illumination | www.wcico.com