


# Round 280 LED Module – High Bay

**Module Code:** R280SA203020

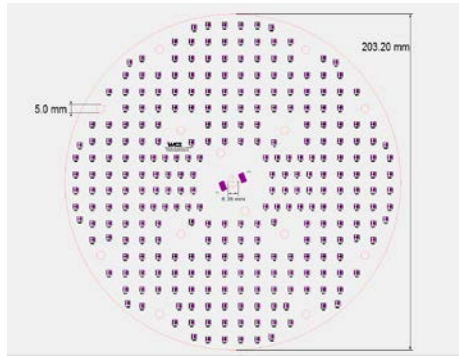

## Module Description

- Designed for a wide range of applications
- Suitable for high bay projects
- Available in stock for 2400K-6500K CCT
- Available in 70, 80 or 90 CRI options
- Maximum efficiency and better heat dissipation
- UL recognized LED module with ROHS components

LED		PCB		Applications
Brand	Nichia / Samsung	Part No.	R8R280N28-A	
Part Number	3030 Package	Material	MCPCB 2OZ Cu	
Number of LED	280	Size	Diameter 203.2 mm	
Color Temperature	2400-6500 CCT	Thickness	1.6 mm	

DRIV		PERFORMANCE	
Input Voltage	78 - 88 VCD	Lumen Output	5000K CCT at 1700 mA, 22580 Lumens/ Nichia 5000K CCT at 1700 mA, 24820 Lumens/ Samsung 5000K CCT at 1500 mA, 20100 Lumens/ Nichia 5000K CCT at 1400 mA, 20750 Lumens/ Samsung
Input Current	350-1700 mA	Luminous Efficiency	150 Lm/W for 1700 mA, Nichia 184 Lm/W for 1700 mA, Samsung 154 Lm/W for 1500 mA, Nichia 190 Lm/W for 1400 mA, Samsung
Type	Constant Current	Board Wattage	150W at 1700mA Nichia 135W at 1700mA Samsung 130W at 1500mA Nichia 101W at 1400mA Samsung

