


Curve board for 2-foot circle application

Module Code: C042NI294314

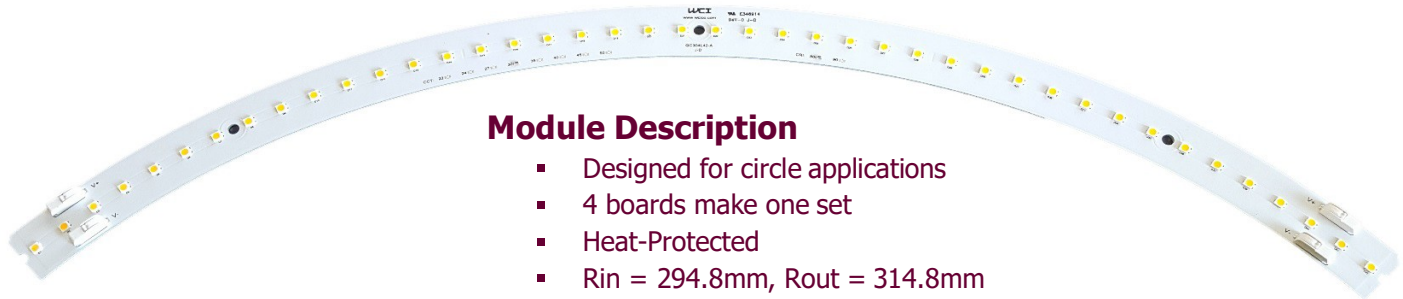

Module Description

- Designed for circle applications
- 4 boards make one set
- Heat-Protected
- Rin = 294.8mm, Rout = 314.8mm
- UL and ISO 9001 certified module

LED		PCB		Applications
Brand	Nichia	Part No.	QC304L42-A	
Part Number	NFSL757GT-V1	Material	MCPCB	
Number of LED	42 per Board 168 per Set	Size	R center = 304.8mm Width = 20mm	
Color Temperature	2200-6500 CCT	Thickness	1.6 mm	

DRIVER		PERFORMANCE PER SET	
Input Voltage	42 Volts	Lumen Output	5000K CCT at 350 mA, 2650 Lumens 5000K CCT at 700 mA, 5150 Lumens 5000K CCT at 1050 mA, 7500 Lumens 5000K CCT at 1400 mA, 9400 Lumens 5000K CCT at 1750 mA, 11000 Lumens
Input Current	86-450 mA per board 1350-1800mA per set	Luminous Efficiency	180 Lm/W at 350mA, 175 Lm/W at 700mA 170 Lm/W at 1050mA, 160 Lm/W at 1400mA 150 Lm/W at 1750mA
Type	Constant Current	Set Wattage	14.7 W at 350 mA, 29 W at 700 mA 44 W at 1050 mA, 59 W at 1400 mA 73.5 W at 1750 mA



World Class Illumination Inc. is a subdivision of World Class Electronics Inc.

2530 Calcite Circle, Newbury Park, CA 91320 USA | T: 805.499.9513 | F: 805.499.5269 | www.wcico.com

